



Adjustable fan speeds



Carbon filter (optional)



LED lamps



Easy to clean

CSF3601X

Wall-mounted cooker hood

- 60 cm width
- 3 fan speeds
- Carbon filter or flue installation
- Low noise level (51-66 dB)
- Easy to clean

A classic cooker hood

This wall-mounted cooker hood is efficient yet has a low noise level. The classic look is suitable for any household. It has 3 fan speeds and built-in LED lamps, making the cooking easy.

Efficient performance at different fan speeds

The cooker hood lets you select a fan speed that suits your needs. This is a true friend in the kitchen, keeping the cooking environment fresh and grease-free.

Option to use with carbon filter

This cooker hood can be installed with an existing flue outlet, but also has the option to use a carbon filter. The carbon filter removes any impurities and odours from the air when it is recycled into the kitchen. Both installation options gives you a cooker hood with excellent performance.

Low-energy lamps

The built-in LED lamps gives effective lighting at a fraction of the energy spent compared to regular light bulbs, the life span is also remarkably longer.

Easy to clean filter


The removable aluminium grease filter are easy to clean. Handwash the filter or let the dishwasher do the dirty work. With little to no maintenance, this cooker hood is always exceeding expectations. Enjoy a fume-free and hassle-free cooking experience.



Colour	Stainless steel
Installation	Wall-mounted
Type of control	Buttons
Filter type	Aluminium, carbon
LED lamps	2
Levels of speed	3
Backdraft damper	Yes

Net weight	7 kg
Height, adjustable	573-923 mm
Width	595 mm
Depth	481 mm
Minimum height above electric range	650 mm
Minimum height above gas range	650 mm
Flue outlet, diameter	150/120 mm
Power supply	220-240 V, 50 Hz
Cord length, plug type	1.3 m, F-type
Rated power	68 W
Sound power level, min speed (LWA)	51 dB
Sound power level, max speed (LWA)	66 dB
Sound power level, boost (LWA)	-
Motor power	65 W
Maximum air flow	346 m³/h
Measured air flow rate at best efficiency point	202 m³/h
Energy efficiency class	B
Grease filtering efficiency class	C
Fluid dynamic efficiency	13.9
Nominal power of the lighting system	3 W
Model identifier	CSF3601X

Technical drawing of the 'L' model chimney. The drawing shows a square base with a side length of 595 mm. The base has a thickness of 20 mm. The base is divided into four trapezoidal sections, each with a width of 481 mm. The base is supported by a central vertical pipe with a diameter of 172 mm. The total height of the chimney is 180 mm. The chimney has a minimum height of 393 mm and a maximum height of 743 mm. The chimney has a maximum height of 573 mm and a maximum height of 923 mm.

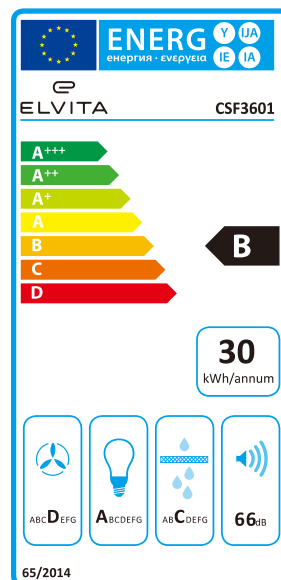

The information may be subject to changes. Inadvertent errors in information may occur.